



Equipped with AEM® Dryflow™ Filter
No Oil Required!

INSTALLATION INSTRUCTIONS


PART NUMBER: 21-9210

| | | |
|-----------|-----------------------------------|-----------------------|
| 1994-2002 | DODGE Ram 2500 Pickup L6-5.9L DSL | C.A.R.B. E.O. # D-670 |
| 1994-2002 | DODGE Ram 3500 Pickup L6-5.9L DSL | C.A.R.B. E.O. # D-670 |

* **NOTE: Legal in California only for racing vehicles which may never be used upon a highway**

PARTS LIST

| | Description | Qty. | Part Number |
|---|---|------|-------------|
| A | Element Parts Kit 4.00x 9" DSL Oval Dry | 1 | 21-2259DK |
| B | Inlet Pipe | 1 | 2-82101 |
| C | Heat Shield | 1 | 20-8210 |
| D | Elbow, 4.00 Tight 90 Deg. | 1 | 5-490 |
| E | Edge Trim, 30" | 1 | 8-4030 |
| F | Insert, Diesel A/F Assy. 4" | 1 | 5-2259 |
| G | Grommet, 1/2" 3/32 GW | 1 | 784646 |
| H | Mount, Rubber 1" X 8mm | 2 | 1228560 |
| I | Rubber Edge Trim 16" | 1 | 8-3016 |
| J | Zip Tie, 8" Tree Push-Mnt. | 2 | 1-127 |
| K | Washer, 6mm Soft Mount | 3 | 559999 |
| L | Washer, 8mm Soft Mount | 4 | 559960 |
| M | Nut, M6 Hex Serrated | 3 | 444.460.04 |
| N | Nut, M8 Hex Serrated | 4 | 444.460.08 |
| O | 1/2" Bnd. Hose Clamp, 3.56"-4.50" | 3 | 9464 |

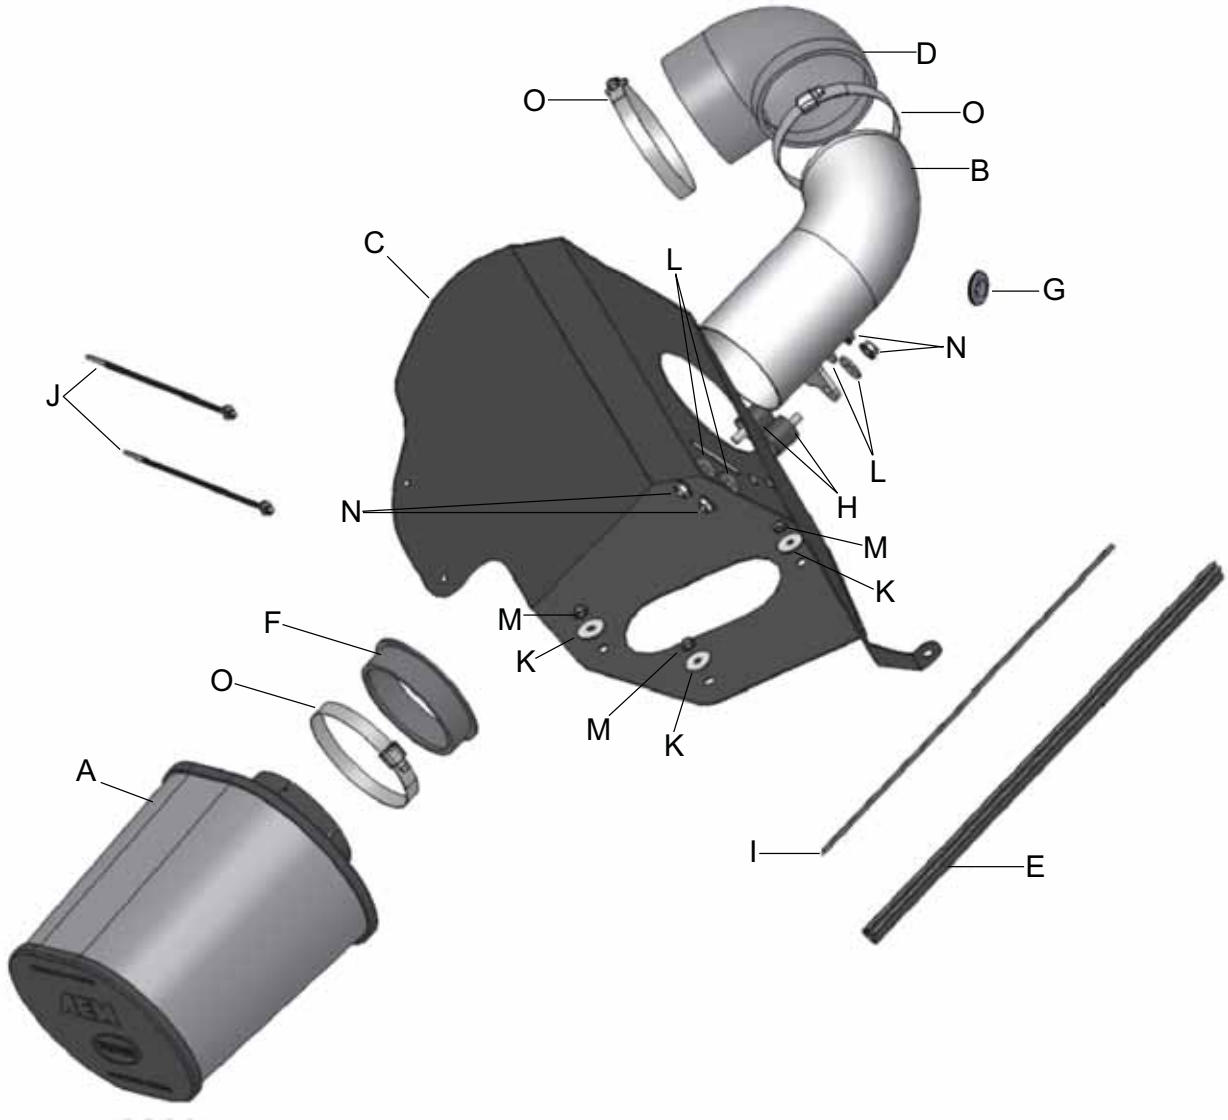

Read and understand these instructions **BEFORE** attempting to install this product. Failure to follow installation instructions and not using the provided hardware may damage the intake tube, throttle body and engine.

1. Preparing Vehicle

- a. Make sure vehicle is parked on level surface.
- b. Set parking brake.
- c. If engine has run in the past two hours, let it cool down.
- d. Disconnect negative battery terminal.
- e. Do not discard stock components after removal of the factory system.

2. Removal of stock system




a. Factory air box system




b. Loosen the hose clamps securing the flexible inlet hose between the turbo inlet and the air filter housing. Remove the hose.



c. Release the four retaining clips securing the air filter housing lid to the lower housing. Remove the lid.

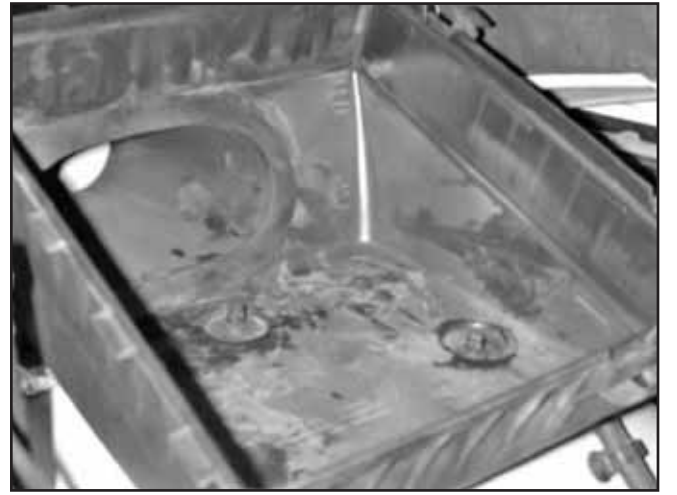

d. Remove the snorkel from the lower air filter housing by squeezing the middle together while pulling towards the center of the vehicle.

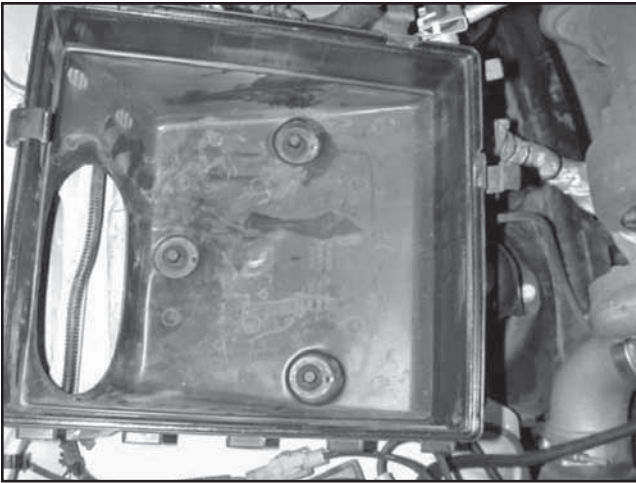


e. Loosen the three plastic nuts securing the lower air filter housing to the vehicle. Remove the housing by gently lifting up.



f. Remove the factory air filter restriction gauge from the stock air filter housing lid.

3. Installation of AEM® intake system.


- a. When installing the intake system, do not completely tighten the hose clamps or mounting hardware until instructed to do so.
- b. Before installing intake pipe, be sure to check for packaging material in the intake pipe.

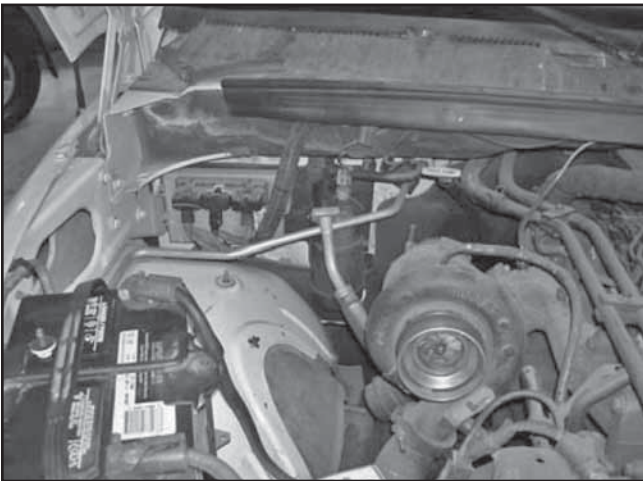


c. Stock intake system removed.




d. Remove the 13mm bolt from the inner fender behind the passenger side battery as shown.

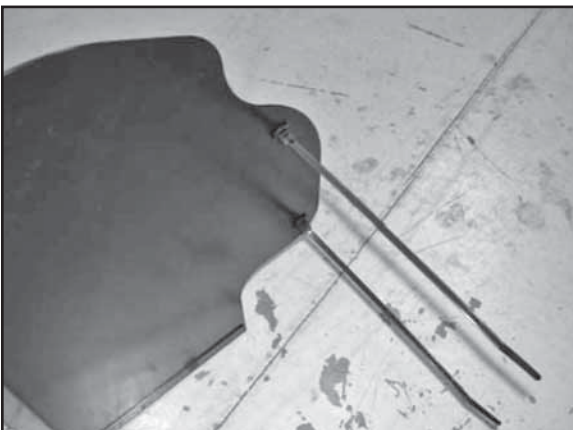


e. Install the two supplied tree mount zip-ties into the two holes on heat shield as shown.

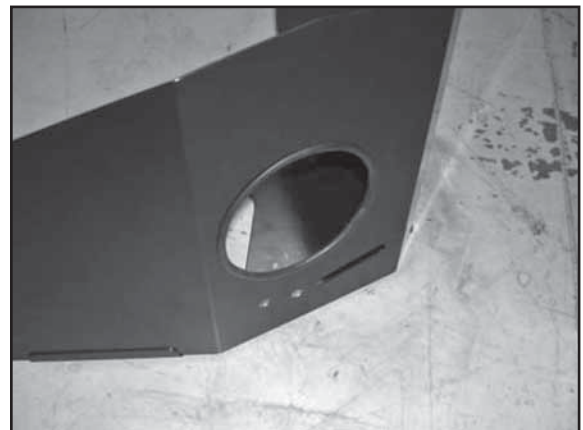


f. Install the supplied rubber edge trim to the hole on the heat shield. Trim to fit.

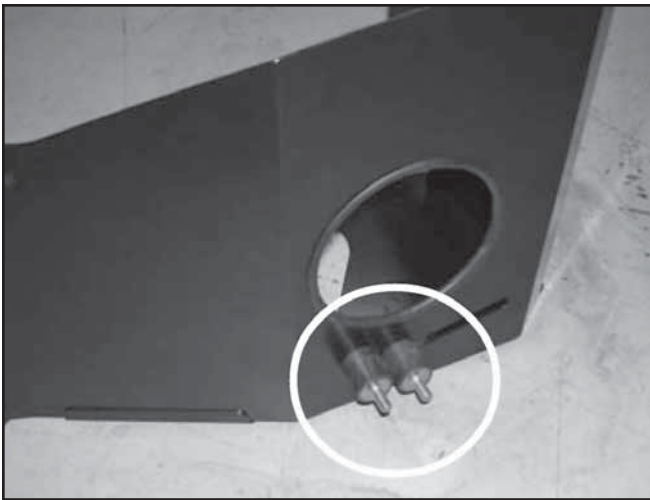

g. Install the two rubber mounts into the two holes on the heat shield using the supplied M8 washers and nuts. Do not tighten the nuts.

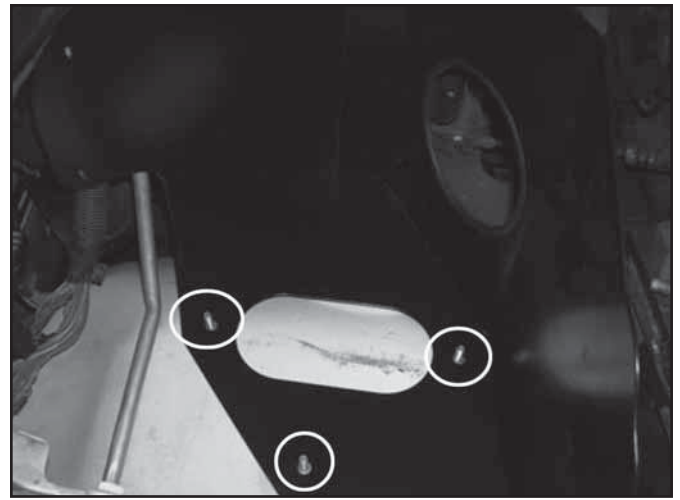


h. Carefully place the heat shield in the engine compartment aligning the three holes on the bottom with the studs in the inner fender.

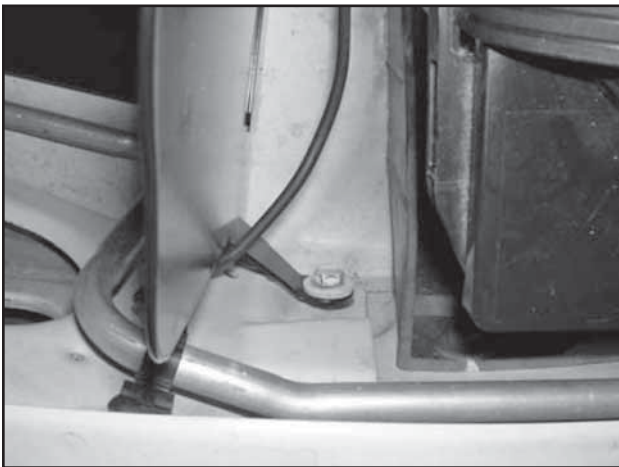

i. Align the small mounting tab with hole where the bolt was removed in step 3c. Reinstall the bolt, securing the heat shield to the inner fender.



j. Install the three supplied M6 nuts and washers onto the studs from step 3h. Once heat shield is aligned properly, fully tighten the nuts and the bolt from step 3i.

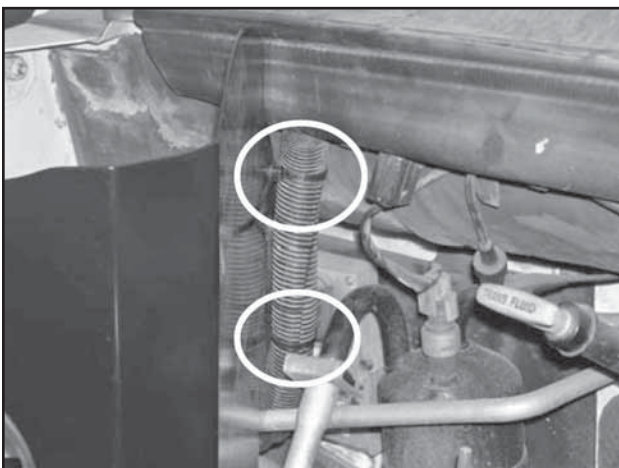


k. Secure the two previously installed zip-ties to the main wiring harness by the vehicle firewall. Trim the excess plastic.




l. Loosely install the 90 degree coupler onto the short end of the pipe as shown. Use a #64 hose clamp but do not tighten it down on the pipe.



m. Install the grommet (784646) onto the pipe (use soapy water to aid installation). Place the grommet into the pipe at an angle and rotate it until the groove engages the pipe. Reinstall filter minder gauge into adapter.

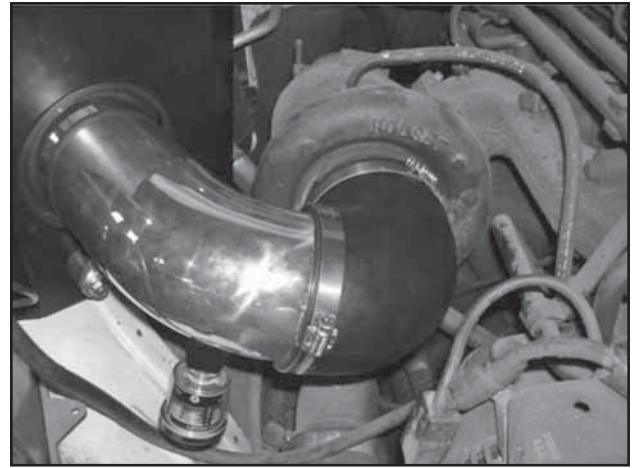

n. Install the intake pipe by sliding the long end of the coupler over the turbo inlet while aligning the mounting bracket on the pipe with the two rubber mounts on the heat shield.

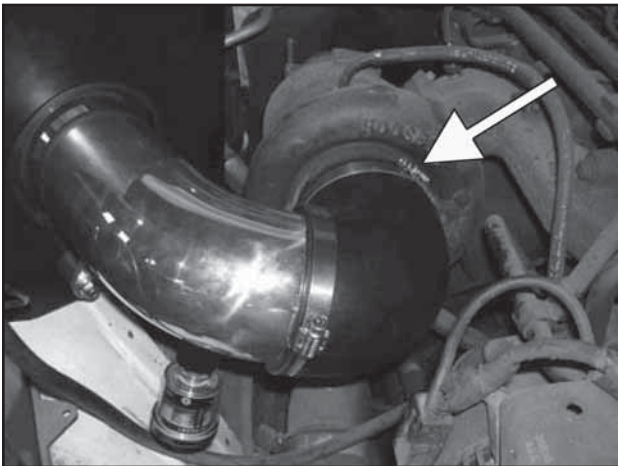

o. Secure the coupler to the turbocharger using a #64 hose clamp but do not fully tighten the clamp yet.




p. Secure the pipe mounting bracket to the heat shield using the supplied M8 washer and bolt.




q. Install the supplied air filter adapter by stretching it over the end of the pipe.




r. Check that the pipe is centered in the heat shield hole. Once confirmed, tighten the nuts on the bracket and the hose clamps on the pipe and turbo.

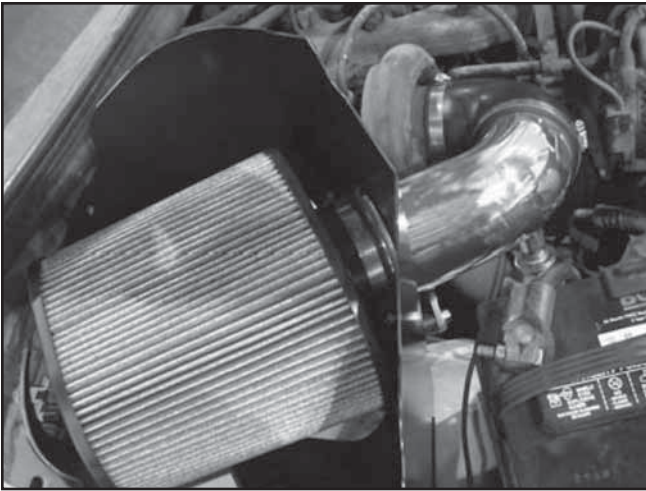

s. Install the Dryflow™ air filter onto the filter adapter. Rotate the air filter until it is not touching any part of the vehicle and secure it using the remaining #64 clamp.

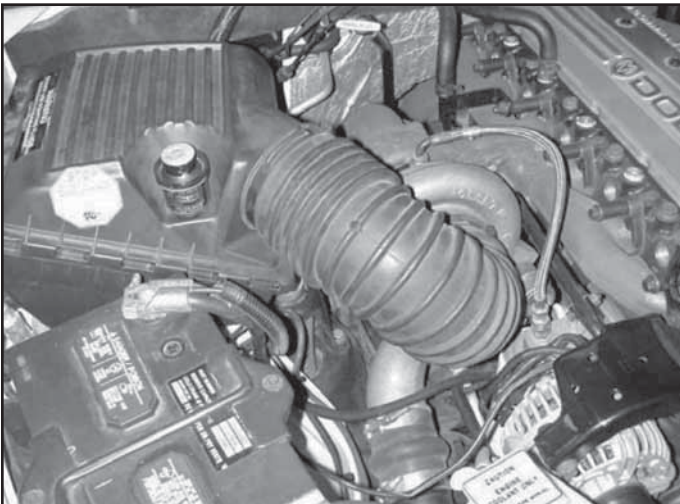

Factory air box installed

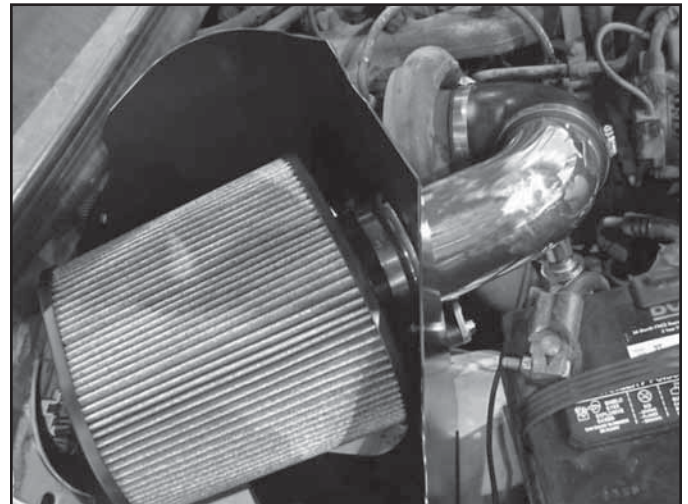

AEM® intake system installed

4. Reassemble Vehicle

- a. Position the inlet pipes for the best fitment. Be sure that the pipes or any other components do not contact any part of the vehicle. Tighten the rubber mount, all bolts, and hose clamps.
- b. Install the rubber gasket onto the top edge of the heat shield and trim the excess. This seals the hood to the heat shield. Check for proper hood clearance. Re-adjust pipes if necessary and re-tighten them.
- c. Inspect the engine bay for any loose tools and check that all fasteners that were moved or removed are properly tightened.
- d. Reconnect negative battery terminals and start engine. Let the vehicle idle for 3 minutes. Perform a final inspection before driving the vehicle.

5. CARB Sticker Placement

- a. The C.A.R.B. exemption sticker, (attached), must be visible under the hood so that an emissions inspector can see it when the vehicle is required to be tested for emissions. California requires testing every two years, other states may vary.

6. Service and Maintenance

- a. It is recommended that you service your AEM® Dryflow™ filter every 20,000 miles for optimum performance. Use AEM Dryflow cleaning kit part # 21-110.
- b. Use aluminum polish to clean your polished AEM® intake tube.
- c. Use window cleaner to clean your powder coated AEM® intake tube. **(NOTE: DO NOT USE aluminum polish on powder coated AEM intake tubes).**

| |
|---|
| For technical inquiries e-mail us at sales@aemintakes.com or call us at 800.992.3000 |
|---|

AEM Air Intake System Warranty Policy

AEM® warrants that its intake systems will last for the life of your vehicle. AEM will not honor this warranty due to mechanical damage (i.e. improper installation or fitment), damage from misuse, accidents or flying debris. AEM will not warrant its powder coating if the finish has been cleaned with a hydrocarbon-based solvent. The powder coating should only be cleaned with a mild soap and water solution. Proof of purchase of both the vehicle and AEM intake system is required for redemption of a warranty claim.

This warranty is limited to the repair or replacement of the AEM part. In no event shall this warranty exceed the original purchase price of the AEM part nor shall AEM be responsible for special, incidental or consequential damages or cost incurred due to the failure of this product. Warranty claims to AEM must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is nontransferable. Improper use or installation, use for racing, accident, abuse, unauthorized repairs or alterations voids this warranty. AEM disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by AEM. Warranty returns will only be accepted by AEM when accompanied by a valid Return Merchandise Authorization (RMA) number. Credit for defective products will be issued pending inspection. Product must be received by AEM within 30 days of the date RMA is issued.

If you have a warranty issue, please call (800) 992-3000 and our customer service department will assist you. A proof of purchase is required for all AEM warranty claims.